



PACCAR PX-9

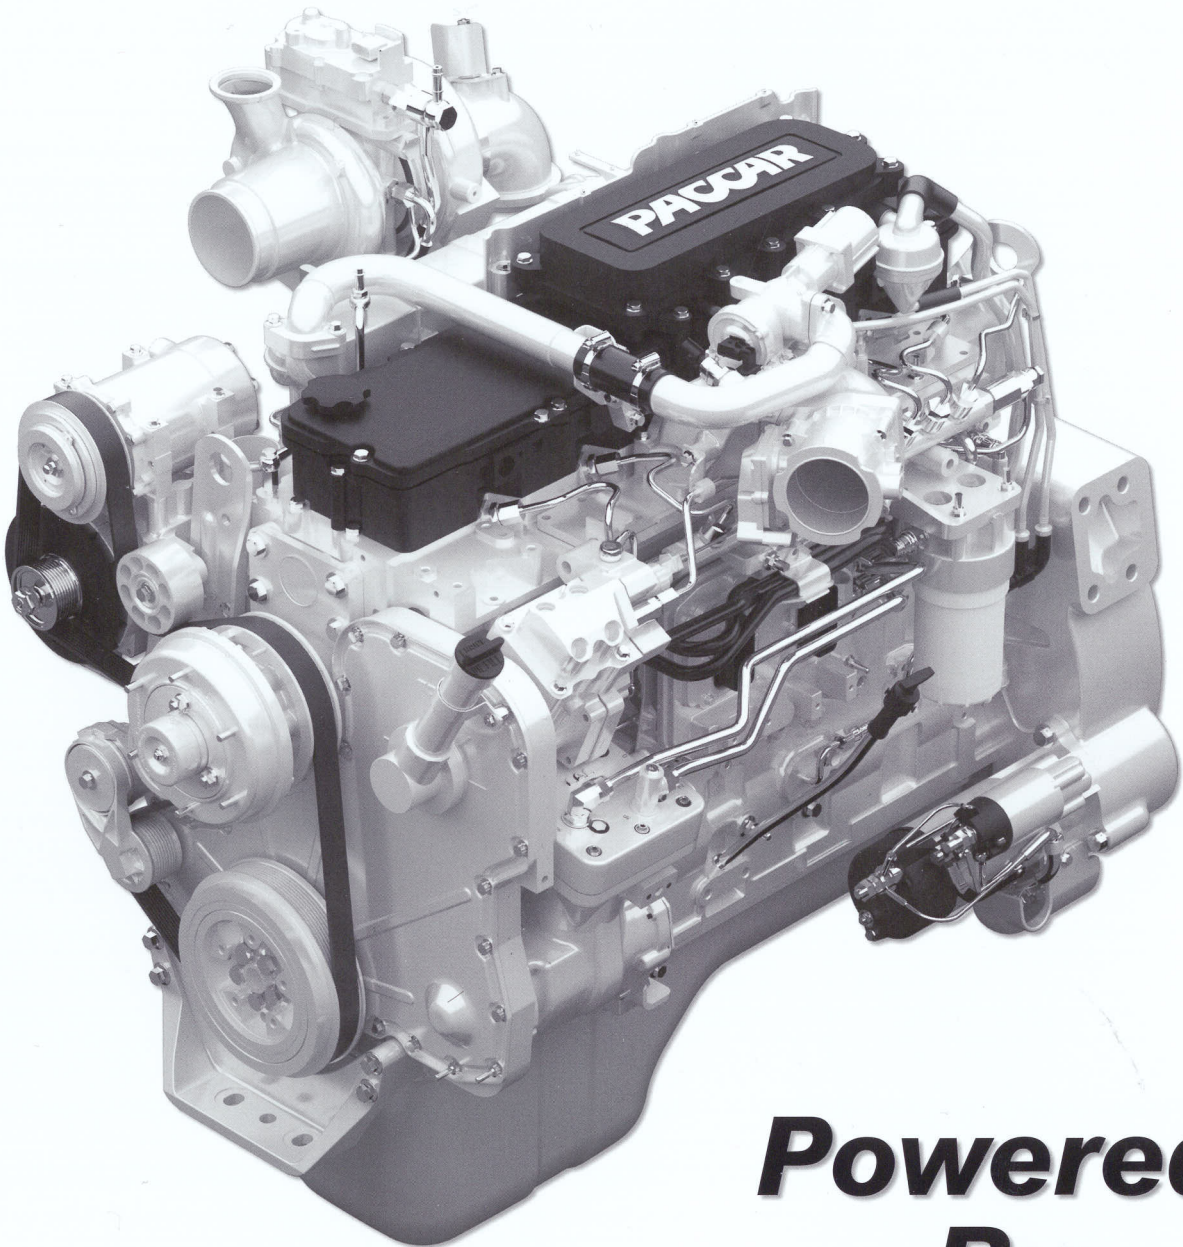

***Powered
By
Quality***

PACCAR PX-9

PROVEN PERFORMANCE. SUPERIOR RESULTS. PERFECT FIT.



The 8.9-liter PACCAR PX-9 engine has one of the highest power-to-weight ratios in its class, with heavy-duty features like replaceable wet liners, roller cam followers, bypass oil filtration and targeted piston-cooling.

Available in both medium and heavy-duty configurations this engine delivers the durability and efficiency needed to lower operating expenses, reduce maintenance and increase productivity.

RATINGS

ENGINE HORSEPOWER	PEAK TORQUE LB-FT @ RPM	GOVERNED RPM	
260	720 @ 1,300	2,200	—
270	800 @ 1,300	2,200	—
300 [*]	860 @ 1,300	2,200	—
330 [*]	1,000 @ 1,400	2,200	—
345	1,150 @ 1,400	2,100	—
350	1,000 @ 1,400	2,200	—
370 [*]	1,250 @ 1,400	2,100	—
380	1,250 @ 1,400	2,100	—
380 [†]	1,150 @ 1,400	2,200	—
400 [†]	1,250 @ 1,400	2,200	—
450 [†]	1,250 @ 1,400	2,200	—

* Also Fire Service Rating
 † Fire Service Rating Only

SPECIFICATIONS

CONFIGURATION	INLINE 6-CYLINDER
BORE X STROKE (MM)	114 x 145
DISPLACEMENT	8.9 LITERS
DRY WEIGHT	1,695 LBS.
OIL SYSTEM CAPACITY	24 U.S. QUARTS
HORSEPOWER	260-450 HP
PEAK TORQUE	720-1,250 LB.-FT.
GOVERNED SPEED	2,100-2,200 RPM
CLUTCH ENGAGEMENT TORQUE [†]	500 LB.-FT. @ 700 RPM
BASE WARRANTY [‡]	2 YEARS/250,000 MILES/400,000 KM

[†]Determined By Engine Horsepower And Idle Setting


[‡]Extended Protection Plans Available

MAINTENANCE INTERVALS




MAINTENANCE ITEM	MILES	KILOMETERS
FUEL FILTER	15,000	24,000
OIL AND FILTER	15,000	24,000
COOLANT FILTER (IF EQUIPPED)	15,000	24,000
DEF FILTER	200,000	320,000

Note: Equipment and specifications shown in this brochure are subject to change without notice. Consult with your PACCAR Engine dealer at time of ordering for standard and optional equipment. PX-9 is a trademark of PACCAR Inc

HORSEPOWER

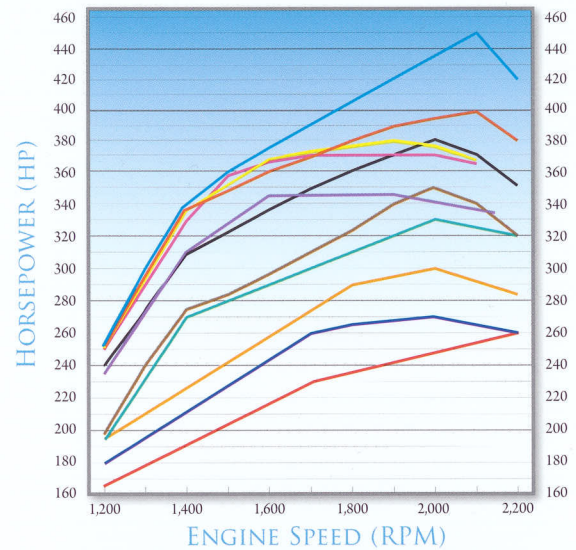

TORQUE

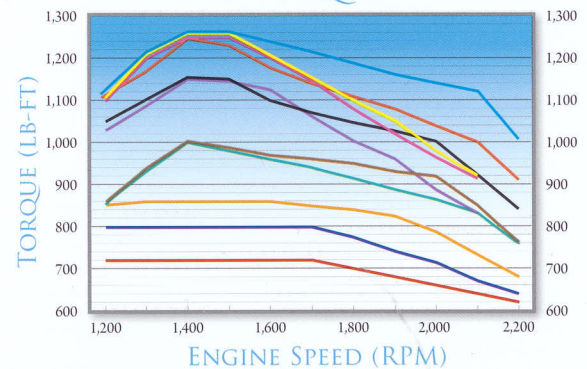

PACCAR Inc
 P.O. Box 1518
 Bellevue, WA 98009
 2013PACCARPX9SPEC/12



© 2012 PACCAR Inc